


## SD 28/38 SMALL DISHWASHER



### Layout and Dimensions

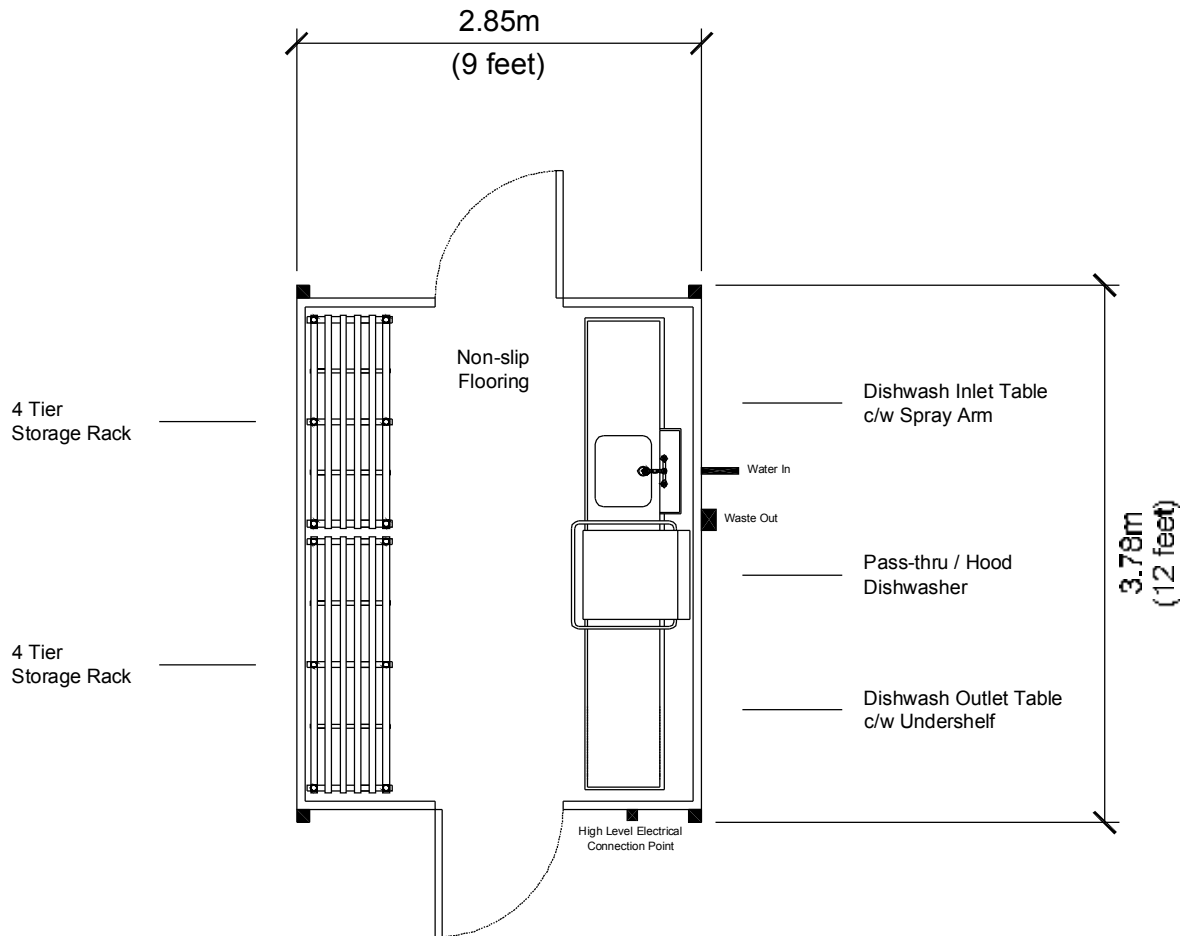

SCALE 1:50

### General Description

The SD 28/38 is a high capacity facility capable of cleaning up to 45 baskets an hour. Though designed specifically for the event and hospitality market, this unit is equally suitable for many other catering operations. The inlet table is equipped with a spray arm and bowl to ensure pre-wash rinsing produces satisfactory results whilst the outlet table is appropriately sized for drying and unloading. With 4 Tier Racking, the cabin can also store many washed items ready for re-use.

# SD 28/38 SMALL DISHWASHER



## Equipment Specifications - Standard Layout

Inlet Table c/w Pre-rinse Bowl & Spray Arm

Cold-fill Pass-thru Hood Dishwasher


Outlet Table c/w Undershef

2 x 4 Tier Storage Racks

Foodsafe wipe-clean walls and ceiling surfaces

Non-slip safety flooring in either heat-welded vinyl or aluminium dural checker-plate finish

Hygienic Vapourproof Fluorescent lighting

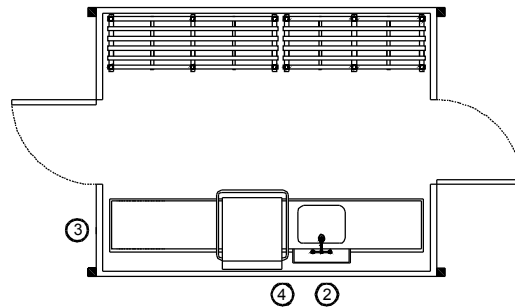

### Technical Specifications

Internal height:	2.3m (7 feet 6½")
External Length:	3.78m (12 feet 4¾")
External Width:	2.85m (9 feet 4¼")
External Height:	2.84m (9 feet 3¾")
External Height on Lorry:	4.5m (14 feet 9¼")
Weight:	2.5 tonnes (approx.)

### Services Connections

- ① Gas: *Not available in this cabin*
- ② Water: 22mm Cold Water Inlet for connection to Mains supply @ 2 bar minimum pressure.
- ③ Electrics: 63 Amp 230 Volt 1Ø (Single Phase) high level connection via Commando Socket. Amperage rating is for connected load total without allowance for diversity.
- ④ Waste: 40mm (1½") Plastic Waste outlet connection.